



Main Features

- Built-in Intel® Atom™ D525 Dual Core 1.8GHz processor
- Fanless and rugged design
- Support ignition signal for delay-time control
- Easy maintenance
- Rich I/O interface with secure lock
- Removable 2.5" SSD tray
- Isolation RS-232/422/485 and GPIO
- DC power input with isolated protection
- Compliant with IP65 design
- EN50155 conformity

Product Overview

nROK 3000 fanless computer conformity with EN50155 is specially designed for railway related applications. Based on Intel® Atom™ D525 processor, nROK 3000 is designed with isolated DC input protection to ensure stable operation in harsh environments. Adopting lock concept, all connectors, such as M12 Ethernet connector on nROK 3000, are designed for anti-vibration. Equipped with a SIM card holder, CFast socket and mini-PCIe socket for optional 3G wireless module, nROK 3000 allows data to be transmitted over network and stored in a convenient SSD (Solid-State Drive) or CFast card for better vibration and shock protection. The EN50155 conformity nROK 3000 is a reliable solution for railway applications.

Specifications

CPU

- Intel® Atom™ D525 Dual Core 1.8GHz

Main Chipset

- Intel® ICH8M chipsets

Memory

- 1GB DDR3 1333MHz SODIMM (up to 4GB)

Expansion

- 1 x mini-PCIe socket (PCIe + USB) for WLAN option
- 1 x mini-PCIe socket (USB) for 3.5G module option
- 1 x optional GPS module

I/O Interface-Front

- 1 x DVI-I connector with DVI-D and VGA output
- 1 x 26-pin circular connector in support of 1 x RS232(Full), 1 x RS422 & 2 x RS485
- 1 x USB 2.0 with M12 connector
- 1 x Mic-in & 1 x Line-out
- 3 x 10/100 Ethernet with M12 connector
- Wireless communication
 - 1 x External accessible SIM card socket
 - 3 x Antenna holes for WWAN/WLAN/GPS
- 4 x LED for power, SSD, WWAN and WLAN
- DC Input
 - nROK 3000-A: 24V with 500V isolated (range: 16.8V ~ 30V)
 - nROK 3000-F: 110V with 1.5KV isolation (range: 77V ~ 137.5V)

I/O Interface-Rear

- 1 x 2.5" accessible SATA SSD tray
- 2 x USB 2.0

Expandable Storage

- 1 x 2.5" SATA SSD tray
- 1 x CFast slot with protection cover

Power Management

- Status of ignition check by software
- Setting 8 level on/off delay time by software

Operating System

- Windows Embedded Standard 2009
- Windows Embedded Standard 7

System Dimension

- 260mm (W) x 178mm (D) x 70mm (H) (10.24"x 7"x 2.76")


Construction

- Aluminum enclosure with fanless design

Environment

- Operating temperatures:
 - Ambient with air -40°C to 70 °C (EN50155 Class TX)
- Storage temperatures: -40°C to 80°C
- Damp heat test: 55°C, 95% RH (non-operating, EN 50155)
- Relative humidity: 0% to 90% (non-condensing)

Dimension Drawing

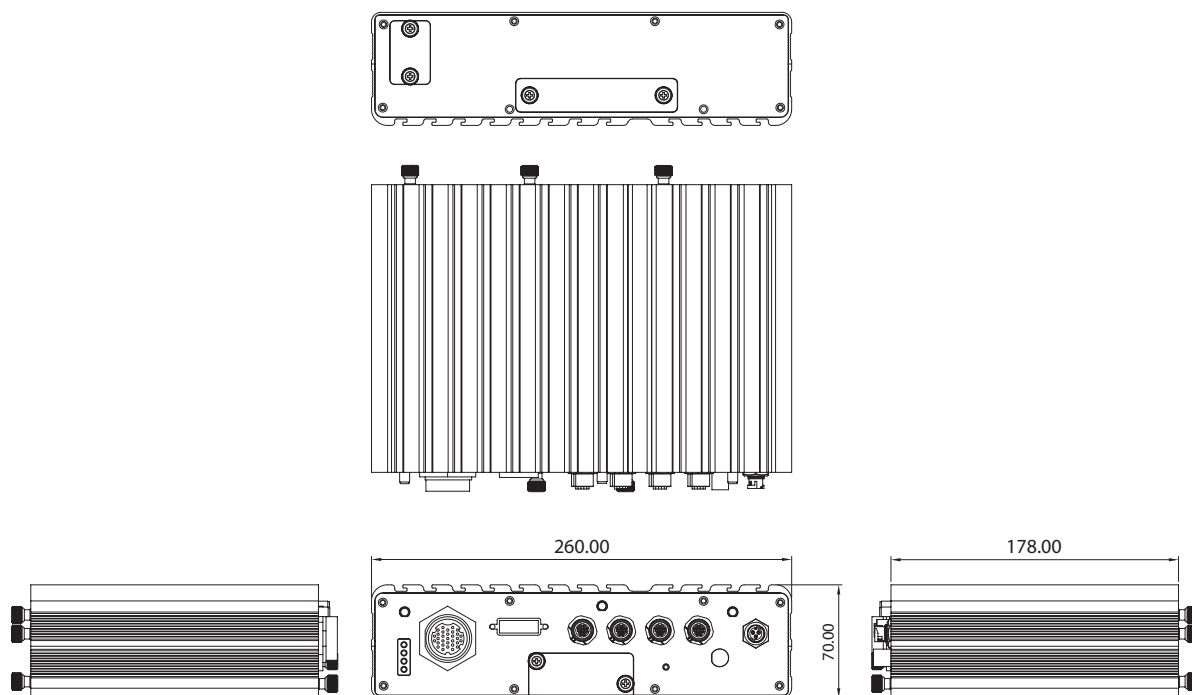

- Vibration (random):
Conformity with EN61373 Category 1 Class B
- Shock:
Conformity with EN61373 Category 1 Class B

Ingress Protection

- IP65 rating

Standards/Certifications

- CE
- FCC Class A
- Conformity with EN50155

Ordering Information

- **nROK 3000-A (P/N: 10A00300000X0)**
Intel® Atom™ D525 fanless railway computer with 24VDC isolation power input
- **nROK 3000-F (P/N: 10A00300001X0)**
Intel® Atom™ D525 fanless railway computer with 110VDC isolation power input

Optional Accessories

Part No.	Description
10VK0006013X0	Wireless mini card kit, Ralink 802.11b/g/n 2T2R, QCOM: Q802XKN5F, w/antenna & cable (without assembly in NEXCOM)
10VK0WWAN01X0	VTK-WWAN: Cinterion PHS8-P kit, Five bands, UMTS/HSPA (850/800, 900, 1900 and 2100 MHz), Quad-Band GSM w/internal cable, antenna & packing
10VK0006007X0	Bluetooth kit, QCOM: QBTM400-01 (V7), w/antenna & cable (without assembly in NEXCOM)
TBD	GPS Module (ublox NEO-M8N solution)
60233SAM03X00	Internal cable for GSM/WLAN/GPS antenna connection MOQ: 20 pcs
60233SAM05X00	GPS antenna/5m/SMA180P
60233SAM07X00	GSM/GPRS antenna, SMA, support 850/900/1800/ 1900
60233SMA30X00	GPS+GSM combo antenna 5M/SMA180P
60233SAM17X00	GPRS/UMTS/HSDPA antenna, SMA, support 850/900/1800/1900/2100
60233PW243X00	POWER CABLE: Waterproof 4P L: 300mm
60233USB89X00	M12 TO USB CABLE: Waterproof M12 TO USB CON L: 200mm
60233AUD27X00	AUDIO CABLE: Waterproof MINI SIZE 6P TO DC3.5mm FEMALEx2 L: 300mm
60233DVI26X00	DVI Y-CABLE: Waterproof DVI(24+5P) to DVI(24+5P)/D-SUB(15P) L:100mm
6023331451X00	COM CABLE: Waterproof 31PIN to DB9 MALEx4/DB9 FEMALEx1 L=150mm