

# Nuvo-5095GC

Compact and Wide-Temperature GPU-Computing Platform with nVidia® GeForce® GTX 950 / GTX 1050 and Intel® 6th-Gen Core™ Processor



CE FC

## Key Features

- Supports nVidia® GeForce® GTX 950\* and GTX 1050\* GPU
- Patented thermal design to allow -25°C to 60°C wide-temperature system operation
- Supports Intel® 6th-Gen Core™ i7/i5 LGA1151 CPU
- 6x GigE ports, supporting 9.5 KB jumbo frame
- Up to 32 GB, DDR4-2133 SODIMM
- 240 mm x 225 mm x 111 mm compact footprint
- Compatible with MeziO™ interface for function expansion
- Accommodates two 2.5" SATA HDD/SSD with RAID 0/1 support
- Patented ventilation hole\* for graphic card

\*R.O.C Patent No. M534371 / M456527

## Introduction

Nuvo-5095GC opens a new chapter for industrial computers. As the first embedded controller targeting at emerging applications of CUDA computing, autopilot, deep learning and virtual reality, Nuvo-5095GC integrates all features required for a compact, reliable and powerful GPU-computing platform.

Supporting nVidia® GeForce® GTX 950\* and GTX 1050\* GPU, Nuvo-5095GC possesses 768 CUDA cores to deliver tremendous computing power for arithmetic/graphics operations. Neousys' patented Cassette technology and innovative thermal design help to effectively dissipate the heat generated by GPU, thus make this compact system capable of operating reliably at 60°C with 100% GPU loading.

Nuvo-5095GC is based on Intel® Skylake platform, supports 35W/65W 6th-Gen Core™ processors and up to 32GB DDR4 memory. It offers rich I/O functions, such as GbE, USB 3.0 and COM ports, to connect external devices. All these extraordinary features are integrated into a very compact, 240 x 225 x 110 mm footprint. For fast-growing GPU-computing applications, Nuvo-5095GC presents the first industrial-grade, compact and rugged platform incorporating CPU and GPU to offer performance far beyond traditional industrial computers.


\* Customers shall use Neousys' recommended nVidia® GeForce® GTX 950 / 1050 graphics card (75W TDP) to make sure the best system compatibility and reliability.

## Specifications


System Core		Expansion Bus	
<b>Processor</b>	Supports Intel® 6th-Gen Core™ LGA1151 CPU - Intel® Core™ i7-6700 (8M Cache, 3.4/4.0 GHz, 65W TDP) - Intel® Core™ i5-6500 (6M Cache, 3.2/3.6 GHz, 65W TDP) - Intel® Core™ i7-6700TE (8M Cache, 2.4/3.4 GHz, 35W TDP) - Intel® Core™ i5-6500TE (6M Cache, 2.3/3.3 GHz, 35W TDP)	<b>Mini PCI-E</b>	1x internal mini PCI Express socket with front-accessible SIM socket 1x internal mini PCI Express socket with internal SIM socket (mux with mSATA)
<b>Chipset</b>	Intel® Q170 Platform Controller Hub	<b>Expandable I/O</b>	1x MeziO™ expansion port for Neousys' MeziO™ modules
<b>Graphics</b>	nVidia® GeForce® GTX 950* and GTX 1050 Ti* GPU (75W TDP), or Integrated Intel® HD 530/510 Controller	<b>Power Supply</b>	
<b>Memory</b>	Up to 32 GB DDR4-2133 SDRAM by two SODIMM sockets	<b>DC Input</b>	1x 3-pin pluggable terminal block for 8–35VDC DC input
<b>AMT</b>	Supports AMT 11.0	<b>Remote Ctrl. &amp; Status Output</b>	1x 10-pin (2x5) wafer connector for remote on/off control and status LED output
<b>TPM</b>	Supports TPM 2.0	<b>Mechanical</b>	
<b>I/O Interface</b>		<b>Dimension</b>	240 mm (W) x 225 mm (D) x 111 mm (H)
<b>Ethernet</b>	6x Gigabit Ethernet ports by Intel® 1x I219 and 5x I210	<b>Weight</b>	4.8 kg (incl. CPU, GPU, memory and HDD)
<b>USB</b>	4x USB 3.0 ports via native XHCI controller 4x USB 2.0 ports	<b>Mounting</b>	Wall-mount by mounting bracket
<b>Video Port (Integrated Graphics)</b>	1x stacked VGA + DVI-D connector 2x DisplayPort connectors, supporting 4K2K resolution	<b>Environmental</b>	
<b>Serial Port</b>	2x software-programmable RS-232/422/485 port (COM1 & COM2) 1x RS-232 port (COM3)	<b>Operating Temperature</b>	with i7-6700TE, i5-6500TE (35W TDP) -25°C ~ 60°C ** with i7-6700, i5-6500, i3-6100 (65W/51W TDP) -25°C ~ 60°C **/* (configured as 35W CPU mode) -25°C ~ 50°C **/* (configured as 65W/51W CPU mode)
<b>Audio</b>	1x Mic-in and 1x Speaker-out	<b>Storage Temperature</b>	-40°C ~ 85°C
<b>Storage Interface</b>		<b>Humidity</b>	10%~90%, non-condensing
<b>SATA HDD</b>	2x Internal SATA port for 2.5" HDD/SSD installation, supporting RAID 0/1	<b>Vibration</b>	Operating, 5 Grms, 5-500 Hz, 3 Axes (w/ SSD, according to IEC60068-2-64)
<b>mSATA</b>	1x full-size mSATA port (mux with mini-PCIe)	<b>Shock</b>	Operating, 50 Grms, Half-sine 11 ms Duration (w/ SSD, according to IEC60068-2-27)
<b>Expansion Bus</b>		<b>EMC</b>	CE/FCC Class A, according to EN 55022 & EN 55024
<b>PCI/PCI Express</b>	1x PCIe x16 slot @ Gen3, 8-lanes PCIe signals in Cassette for installing nVidia® GeForce® GTX 950 / 1050 Ti		

\*\* The high operating temperature specified here is defined under the condition of 100% GPU loading applied using TessMark x64 GPU stress test. For detail testing criteria, please contact Neousys Technology  
\*\*\*For sub-zero operating temperature, a wide temperature HDD drive or Solid State Disk (SSD) is required.

## Appearance

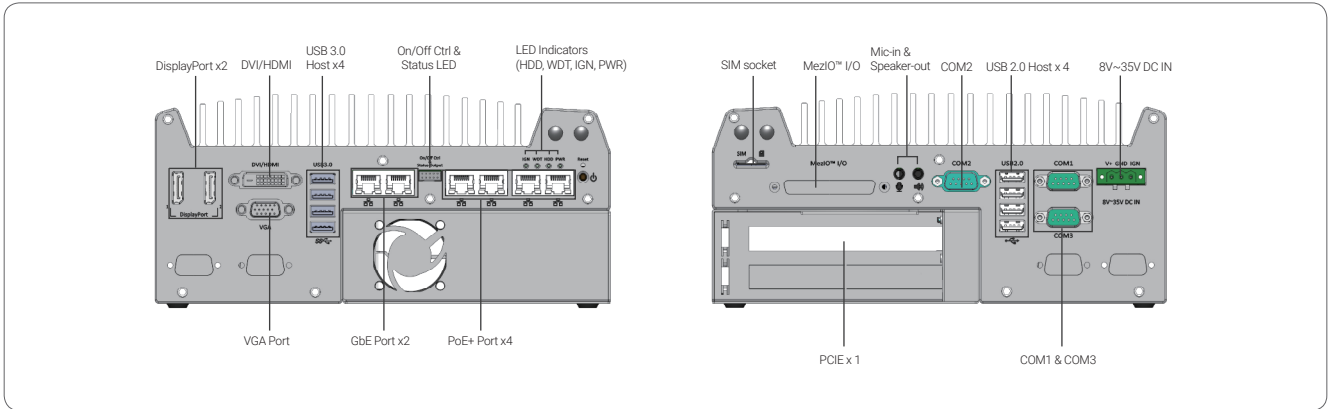

## Dimensions

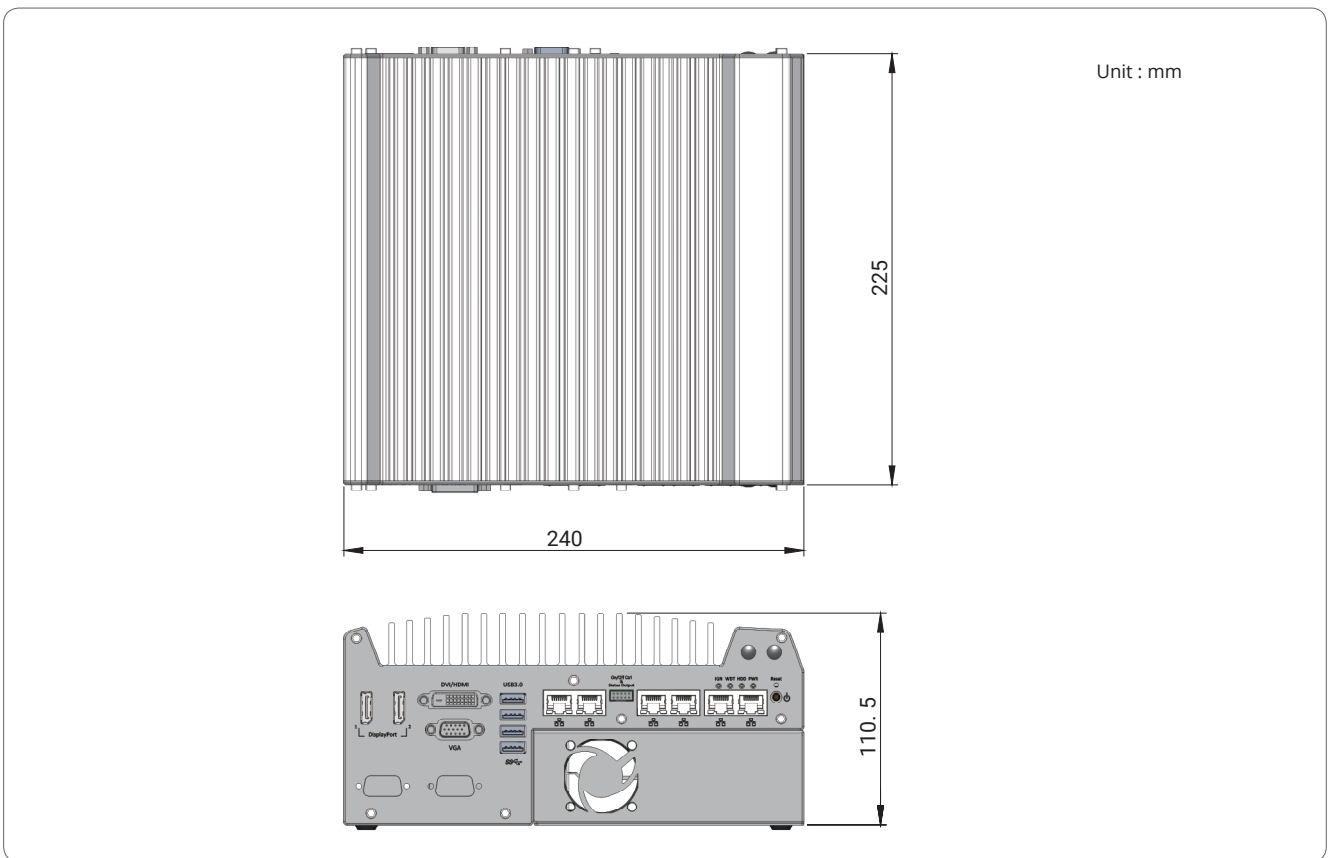

## Ordering Information

Model No.	Product Description
Nuvo-5095GC	Intel® 6th-Gen Core™ GPU-computing platform with 6x GbE and MeziO™
Nuvo-5095GC-GTX950	Intel® 6th-Gen Core™ GPU-computing platform with 6x GbE, MeziO™ and pre-installed GTX 950 graphics card
Nuvo-5095GC-GTX1050	Intel® 6th-Gen Core™ GPU-computing platform with 6x GbE, MeziO™ and pre-installed GTX 1050 graphics card

## Optional Accessories

20V, 160W AC/DC power adapter

### MeziO™ Modules

MeziO™-C180	MeziO™ module with 4x RS-232/422/485 ports and 4x RS-232 ports
MeziO™-C181	MeziO™ module with 4x RS-232/422/485 ports and 4x RS-422/485 ports
MeziO™-D220	MeziO™ module with 8-CH isolated digital input and 8-CH isolated digital output
MeziO™-D230	MeziO™ module with 16-CH isolated digital input and 16-CH isolated digital output
MeziO™-V20-EP	MeziO™ module with ignition power control function for in-vehicle usage