



Main Features

- ♦ On-board Intel® Atom™ N270 Processor, 1.6GHz
- ♦ Intel® 945GSE chipsets
- ♦ Dual 10/100/1000 Mbps LAN ports
- ♦ 2 x USB2.0/VGA/DVI-D/1 x PS/2
- ♦ 1 x RS232/422/485 and 1 x RS232
- ♦ Support +12V DC Power Input
- ♦ Supports ATX Power Mode

Product Overview

NISE 101, a tiny fanless industrial computing housed in a size of 185mm/W x 131mm/D x 54mm/H, makes it a perfect match for space critical applications. Designed with Intel® Atom™-based N270 1.6GHZ processor and 945GSE embedded chipset, NISE 101 is an energy-efficient solution in a lightweight system, featuring both performance and reliability in industrial grade non-stop system operating.

The NISE 101 supports one RS232, one RS232/422/485, two 10/100/1000 LAN port, two USB ports, one PS/2 for keyboard/mouse, one VGA and one DVI-D display in demand. With 12V DC input, NISE 101 is easy to link with DC power source or through AC/DC power adapter. Taking the low power consumption advantage, NISE 101 is a fanless EZ Controller, nice device to work in harsh and quiet environment. With the dimension and performance features, NISE 101 is an idea for gate control, public information, self-service system, POS, Kiosk, low-power budget devices, LED signage and logistic system applications.

Specifications

CPU Support

- ♦ On-board Intel® Atom™ N270 processor, 1.6GHz, 667MHz FSB
- ♦ Intel® 945GSE and ICH7M chipsets

Main Memory

- ♦ 1 x DDR2 SO-DIMM sockets, single channel, support up to 2GB DDR2 400/533 SDRAM, un-buffered, non-ECC

I/O Interface-Front

- ♦ ATX Power on/off switch
- ♦ 1 x RS232/422/485
- ♦ 1 x PS/2 for keyboard and mouse
- ♦ 1 x DVI-D
- ♦ 1 x Speaker-out
- ♦ 1 x Mic-in

I/O Interface-Rear

- ♦ 1 x RS232
- ♦ 1 x DB15 VGA
- ♦ 2 x 10/100/1000 Intel® LAN port

- ♦ 2 x USB2.0 port
- ♦ +12V DC power input
- ♦ HDD Access/Power status LEDs
- ♦ 1 x Antenna hole

Device

- ♦ 1 x 2.5" HDD drive bay
- ♦ 1 x internal CF card socket
- ♦ 1 x Mini-PCIe socket

Power Requirements

- ♦ +12V DC input
- ♦ Optional external 60W AC/DC lockable power adapter
 - Power input : 100 to 240V AC 2A 50/60Hz
 - Power output: 12V DC


Dimensions

- ♦ 185mm (W) x 131mm (D) x 54mm (H) (7.28" x 5.2" x 2.13")

Construction

- ♦ Aluminum chassis with fanless design

Dimension Drawing

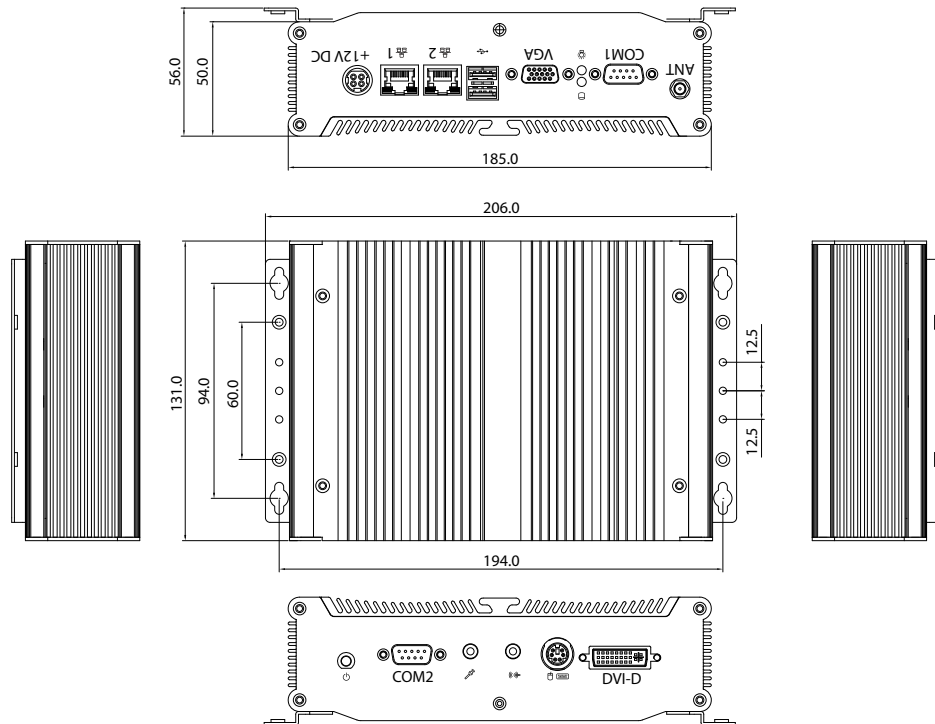

Environment

- Operating temperature:
Ambient with air flow: -5°C ~ 55°C
(According to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14)
- Storage temperature: -20°C ~ 80°C
- Relative humidity: 10% to 93% (Non-Condensing)
- Shock protection: 20G, half sine, 11ms, IEC60068-2-27
- Vibration protection
Random: 0.5Grms @5~500 Hz according to IEC68-2-64
Sinusoidal: 0.5Grms @5~500 Hz according to IEC68-2-6

Certifications

- CE approval
- FCC Class A

Ordering Information

Barebone

- **NISE 101 (P/N: 10J00010100x0)**
Intel® Atom™ N270 Fanless System
- **12V, 60W AC/DC power adapter w/o power cord (P/N: 7400060002X00)**