

NISE 3140M2E

Intel® Core™ 2 Duo Fanless System with IEEE 1394b,
1 x PCI and 1 x PCIe x1 Expansion Slots



Main Features

- ♦ Support Intel® Core™ 2 Duo / Celeron® processor
- ♦ Intel® GM45 chipsets
- ♦ Dual Intel® 82574L Gigabit Ethernet ports
- ♦ Dual VGA or VGA/DVI Independent Display
- ♦ 3 x RS232 and 1 x RS232/422/485 with Auto Direction Control
- ♦ One external locked CF socket
- ♦ Dual IEEE1394b ports
- ♦ On-board DC to DC power design to support 16V to 30V DC power input
- ♦ Support ATX power mode and PXE / WoL / LAN Teaming

Product Overview

Utilizing the Intel® GM45 enhanced chipsets, NISE 3140M2E is highly scalable supporting a wide variety of Intel® Core™ 2 Duo and Celeron® processors. Using the Intel® graphics media accelerator 4500MHD, the rugged NISE 3140M2E delivers exceptional graphics performance with notable rates of data transfer. NISE 3140M2E provides a number of important features required by image processing operation, including dual-channel DDR3 memory, two Gigabit Ethernet LANs, auto-direction control on RS485 and optional IEEE1394b interface. On top of that, NISE 3140M2E supports dual independent displays through 2x VGA, DVI or LVDS outputs. Housed in a robust aluminum chassis, NISE 3140M2E of fanless design offers noise-free, ultra reliable operating in the most demanding of industrial environment.

NISE 3140M2E is compliant with EN60601-1, a standard for medical grade computing system. In addition to industrial applications, NISE 3140M2E series also a perfect solution for healthcare equipments such as surgery recording system, medical inspection, medical research instrumentations, security control ...etc.

Specifications

Main Board

- ♦ NISB 3140M
- ♦ Support Intel® Core™ 2 Duo Processor P8400 (3M Cache, 2.26 GHz, 1066 MHz FSB)
- ♦ Support Intel® Celeron® Processor 575 (1M Cache, 2.00 GHz, 667 MHz FSB)

Main Memory

- ♦ 2x 240-pin DIMM, up to 4GB DDR3 800/1066 MHz SDRAM, un-buffered and non-ECC

Chipset

- ♦ Intel® GM45 Graphics and Memory Controller Hub
- ♦ Featuring the Mobile Intel® Graphics Media Accelerator 4500MHD
- ♦ Intel® 82801IEM (ICH9M-E) I/O Controller Hub

I/O Interface-Front

- ♦ ATX power on/off switch
- ♦ HDD Access/Power status LEDs
- ♦ 1 x Front Access CF Card Socket
- ♦ 2 x USB2.0 ports
- ♦ Dual IEEE1394b ports

I/O Interface-Rear

- ♦ 2-pin Remote Power on/off switch
- ♦ 16 ~ 30V DC input
- ♦ 1 x PS/2 for Keyboard/Mouse
- ♦ 1 x DB25 Parallel Port (Optional GPIO or LVDS interface)
- ♦ 1 x DB44 Serial Port for 4x RS232 (COM2: RS232/422/485 with Auto Flow Control)
- ♦ 2 x GbE LAN ports (10W max./ per slot)
- ♦ 4 x USB2.0 ports
- ♦ 1 x DB15 VGA port
- ♦ 1 x DVI-I Port (DVI-D + VGA)
- ♦ 1 x Speaker-out and Mic-in


Device

- ♦ 2 x 2.5" SATA HDD drive bay
- ♦ 1x external locked CF card socket

Expansion

- ♦ One PCI Expansion (10W max./ per slot)
- ♦ One PCIe x1 Expansion (10W max./ per slot)
- ♦ Add-on card length: 169mm max.

Dimension Drawing

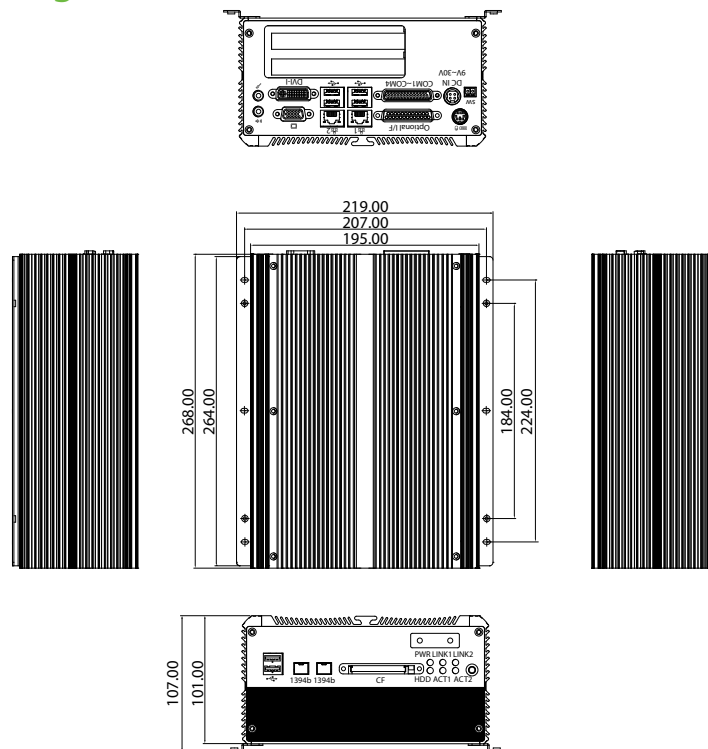

Power Requirements

- ATX power mode
- On-board DC to DC power support from 16V to 30V DC
- Optional power adapter

Dimensions

- 195mm (W) x 268 mm (D) x 101mm (H) (7.7" x 10.5" x 3.98")

Construction

- Aluminum Chassis with fanless design

Environment

- Operating temperature:
Ambient with air flow: -5°C ~ 55°C
(According to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14)
- Storage temperature: -20°C ~ 80°C
- Relative humidity: 10% to 93% (non-condensing)
- Shock protection: 20G, half sine, 11ms, IEC60068-2-27
- Vibration protection
Random: 0.5Grms @5~500 Hz according to IEC68-2-64
Sinusoidal: 0.5Grms @5~500 Hz according to IEC68-2-6

Certifications

- EN60601
- CE approval
- FCC Class B

Ordering Information

Barebone

- **NISE 3140M2E (P/N: 10J00314008X0) RoHS Compliant**
Intel® Core™ 2 Duo / Celeron® Fanless Bare-Bone system with One PCI and One PCIe x1 slots
- **NISE 3140M2 (P/N: 10J00314007X0) RoHS Compliant**
Intel® Core™ 2 Duo / Celeron® Fanless Bare-Bone system with Two PCI slots
- **19V, 120W AC/DC medical grade power adapter w/o power cord (P/N: 7400120006X00)**
- **19V, 120W AC/DC non-medical power adapter w/o power cord (P/N: 7410120002X00)**